

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 090 804 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.04.2001 Bulletin 2001/15

(51) Int. Cl.⁷: B60N 2/28

(21) Application number: 00308653.5

(22) Date of filing: 02.10.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Maier, Dieter
89537 Giengen/Brenz (DE)

(74) Representative:
Hollinghurst, Antony
Britax International Services Limited
Unit 5
Kiln Acre
Wickham Road
Fareham Hampshire PO16 7JS (GB)


(30) Priority: 09.10.1999 GB 9923868

(71) Applicant:
BRITAX RÖMER Kindersicherheit GmbH
D-89024 Ulm (DE)

(54) Child safety seat

(57) A child safety seat comprises a child seat structure (50) having a base support surface (32) for resting on a vehicle seat cushion (12) and a back support surface (34) for abutting against the seat back (14) of the vehicle seat (10). A rigid link (52, 54) is pivotally attached to the child seat structure (50) so as to project from the child seat structure (50) between the base support surface (32) and the back support surface (34). A releasable connector (38) is mounted on the rigid link (52, 54) for engagement with a standard anchorage unit (16) associated with the vehicle seat (10). In the event of sudden deceleration, both the front and rear edges of the base support surface (32) are pressed downwards into the vehicle seat cushion (12) simultaneously. This results in a reduction of the extend of forward excursion of the child's head (42).

Fig.7.

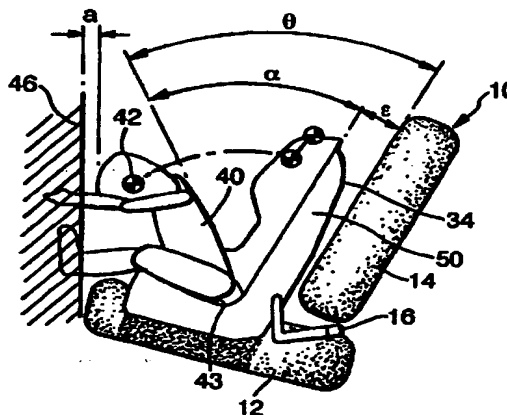

EP 1 090 804 A2

Description

[0001] This invention relates to a child safety seat for use in a vehicle.

[0002] It is well known for a child safety seat to rest on a vehicle seat and to be secured thereon by the corresponding vehicle seat belt. The disadvantage of this arrangement is that, even if the vehicle seat belt is pulled very tight during installation, the resilience of the belt, will permit undesirable movement of the child seat relative to the vehicle in the event of sudden deceleration, for example, during an accident. In order to overcome this disadvantage, it has been proposed to provide vehicle seats with standard anchorage units at agreed locations for engagement by releasable connectors which are attached to the child seat structure by rigid links. Such anchorage units will be referred to hereinafter as "standard anchorage units".

[0003] The invention relates to a child safety seat of the type comprising a child seat structure having a base support surface for resting on a vehicle seat cushion, a back support surface for abutting against the seat back of said vehicle seat, a seating surface for a child occupant, and a rigid link projecting from the child seat structure between the base support surface and the back support surface, and a releasable connector mounted on the rigid link for engagement with a standard anchorage unit associated with the vehicle seat.

[0004] EP-A-0952032 discloses such a child safety seat for use with two standard anchorage units located near the rear edge of the vehicle seat cushion and the bottom of the vehicle seat back. This arrangement is subject to the disadvantage that, in the event of an accident, the child seat tends to rotate about the standard anchorage units, compressing the front part of the vehicle seat cushion and allowing undesirable forward movement of the head of a child occupant of the child seat. The present invention aims to provide a child safety seat in which this disadvantage is mitigated.

[0005] According to the invention, in a child safety seat of the type described above, the rigid link is pivotally attached to the child seat structure.

[0006] Preferably the rigid link is pivotally attached to the child seat structure at a pivot location above the base support surface.

[0007] In the event of sudden deceleration, operation of this arrangement differs from the prior art in that the centre of gravity of the combination of the child seat structure and the seat occupant does not rotate about the standard anchorage units at a constant radius. Instead both the front and rear edges of the base support surface are pressed downwards into the vehicle seat cushion simultaneously. This results in a reduction in the distance of this centre of gravity from the anchorage units and therefore a corresponding reduction in the rotational moment exerted by the inertia of the child seat. The overall result is a reduction of the extend of forward excursion of the child's head.

[0008] Preferably, each rigid link is L-shaped with a first limb carrying the corresponding connector and a second limb having its free end pivotally attached to the child seat structure. In normal use, the first limb lies in a rearward continuation of the plane of the base support surface and the second limb is generally parallel to the back support surface.

[0009] The height of the pivot location above the base surface is at least 30mm so as to be greater than the reduction of the thickness of the vehicle seat cushion when it is fully compressed.

[0010] An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a vehicle seat equipped with standard anchorage units;

Figure 2 is a schematic side view of a known child seat installed on the vehicle seat shown in Figure 1 with a test dummy on the child seat;

Figure 3 is a side view similar to Figure 2 showing the child seat and dummy in an initial phase of movement after sudden deceleration of the vehicle;

Figure 4 is a schematic side view, similar to Figures 2 and 3 after a second phase of deceleration; and Figures 5, 6 and 7 are side views, similar to Figures 2, 3 and 4 respectively showing a child seat in accordance with the invention on the vehicle seat shown in Figure 1.

[0011] Figure 1 shows a vehicle seat 10 equipped with two standard anchorage units according to the first proposal. The seat 10 comprises a seat cushion 12 and a backrest 14. The two standard anchorage units comprise transversely extending rods 16 and 18 which are accessible through openings 20 and 22 in the bottom of the backrest and which are rigidly secured to the frame (not shown) of the seat 10.

[0012] Figure 2 shows a known child seat 30 having a base support surface 32 resting on the seat cushion 12 of the vehicle seat 10 and a back support surface 34 abutting against the backrest 14. A rigid link 36 projects from the junction between the base support surface 32 and the back support surface 34 and is rigidly secured to the child seat 30 so as to be fixed parallel with the base support surface 32. A releasable connector 38 engages with the standard anchorage unit 16. A similar releasable connector (not shown), on another rigid link, engages with the other standard anchorage unit 18. The releasable connectors may be as described in EP-A-0952032.

[0013] The seat is occupied by a test dummy 40 having a reference marking 42 on the side of its head. The dummy 40 is retained on a seating surface 43 of the child seat 30 by a conventional harness (not shown).

[0014] If the vehicle seat 10 is subject to sudden deceleration in the normal direction of travel, the child seat 30 tends to pivot in the counter-clockwise direction

(as viewed in Figures 2 to 4) about the standard anchorage units 16 and 18. This results in compression of the part 44 of the vehicle seat cushion 12 which is under the front edge of the base surface 32 and pivotal movement of the child seat 30 through an angle β as shown in Figure 3. During the next phase of movement, the torso of the dummy 40 pivots about its pelvis through an angle α as shown in Figure 4, resulting in a total forward movement through an angle δ (equal to $\alpha + \beta$). This movement allows the head of the dummy to come into contact with a reference surface 46 positioned in front of the vehicle seat 10, thus exceeding the extent of undesirable forward movement.

[0015] Figure 5 shows a child seat 50 in accordance with the invention, having support surfaces 32 and 34 similar to the correspondingly numbered support surfaces of the child seat 40. However, the releasable connector 38, which engages with the standard anchorage unit 16 is mounted on the end of one limb 52 of an L-shaped link, the other limb 54 of which has its free end attached by a pivot connection 56 to the child seat 50 at a location adjacent to the back support surface 34 above the base support surface 32 at a distance equal to the length of the limb 54. A similar link (not shown) is provided for the connector which engages with the other standard anchorage unit 18.

[0016] Under normal conditions, the link 52, 54 is retained in the orientation shown in Figure 5 by a latch (not shown), such as ball catch which is designed to release when a load is applied. During the first phase of forward movement in the event of sudden deceleration, the link 52, 54 pivots in the counter-clockwise direction about the standard anchorage unit 16. The pivot joint 56 allows the base support surface 32 of the seat 50 to remain generally parallel to the vehicle seat cushion 12, compressing it substantially uniformly, as shown in Figure 6. Consequently, the effective range of angular movement of the child seat 50 about the standard anchorage unit 16 is limited to ϵ , which is substantially less than β . The compression of such a large area of the vehicle seat cushion 12 provides a greater resistance against downward movement of the child seat 50, with the result that the front edge of the base support surface 32 is higher in Figure 6 than in Figure 3.

[0017] During the subsequent phase of movement, the torso of the dummy 40 pivots about its pelvis through the angle α , as before. The total angular movement θ of the dummy 40 is less than the angle δ , as shown in Figure 7. Consequently, the total forward movement of the head of the dummy 40 is less, leaving a clearance a from the reference surface 46, as shown in Figure 7.

[0018] The invention is applicable to seats for use in aircraft as well as to seats for use in land vehicles.

(50) having a base support surface (32) for resting on a vehicle seat cushion (12), a back support surface (34) for abutting against the seat back (14) of said vehicle seat (10), a seating surface (43) for a child occupant, and a rigid link (52, 54) projecting from the child seat structure (50) between the base support surface (32) and the back support surface (34), and a releasable connector (38) mounted on the rigid link (52, 54) for engagement with a standard anchorage unit (16) associated with the vehicle seat (10), characterised in that the rigid link (52, 54) is pivotally attached to the child seat structure (50).

2. A child safety seat according to claim 1, wherein the rigid link (52, 54) is pivotally attached to the child seat structure (50) at a pivot location (56) above the base support surface (32).
3. A child safety seat according to claim 1, wherein the rigid link (52, 54) is pivotally attached to the child seat structure (50) at a pivot location (56) above said seating surface (43).
4. A child safety seat according to claim 2 or 3, wherein the rigid link is L-shaped with a first limb (52) carrying the corresponding connector and a second limb (54) having a free end pivotally attached to the child seat structure (50).
5. A child safety seat according to claim 4, wherein angle between the first and second limbs (52 and 54) of the pivot link is such that the first limb (52) lies in a rearward continuation of the plane of the base support surface and the second limb (54) is generally parallel to the back support surface.
6. A child safety seat according to claim 2, 3, 4 or 5, wherein the height of the pivot location above the base surface is at least 30mm.
7. A child safety seat according to claim 2, 3, 4 or 5, wherein the height of the pivot location above the base surface is greater than the height of the bottom of the seat back (14) of said vehicle seat (10) above the vehicle seat cushion (12).

Claims

1. A child safety seat comprising a child seat structure

Fig.1.

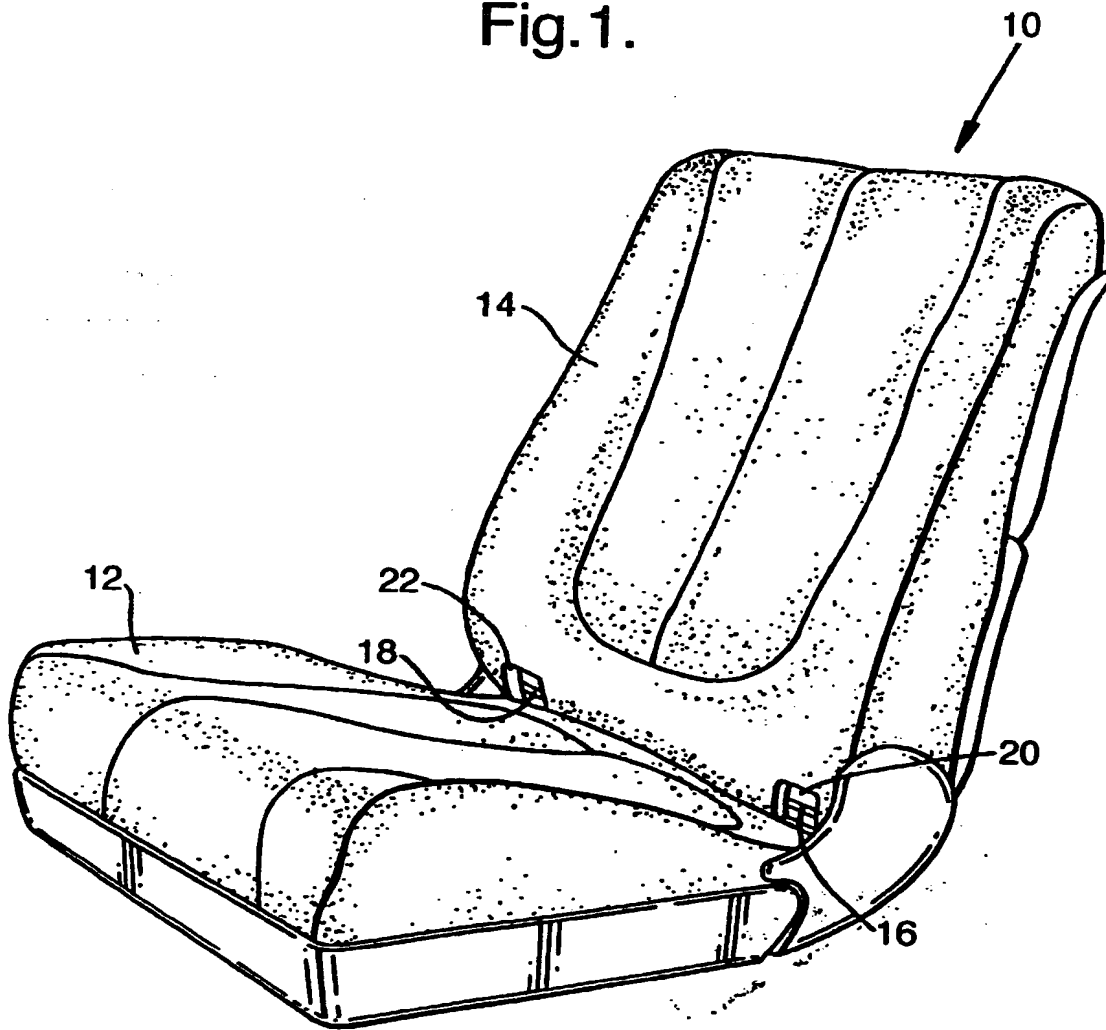


Fig.2.

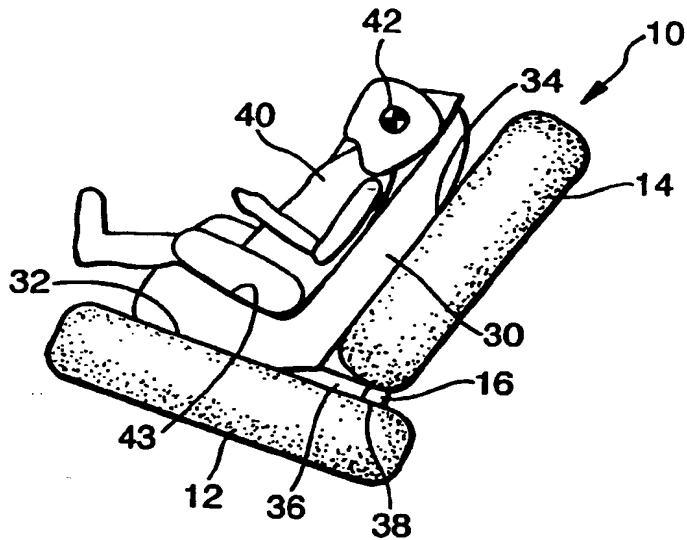


Fig.3.

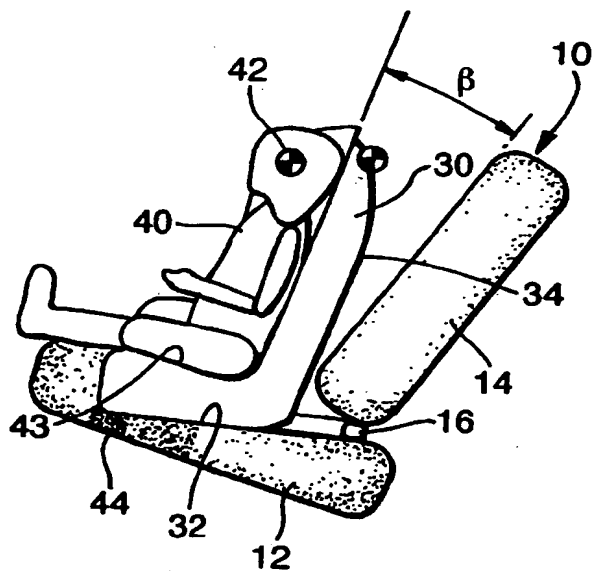


Fig.4.

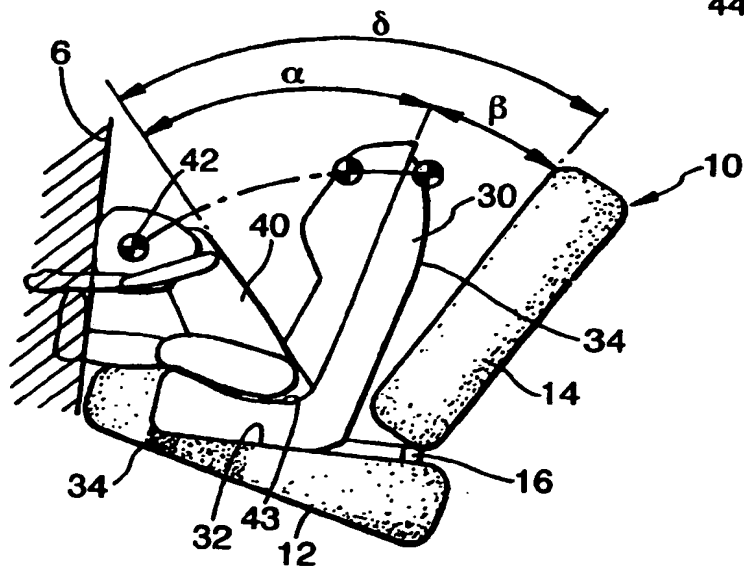


Fig.5.

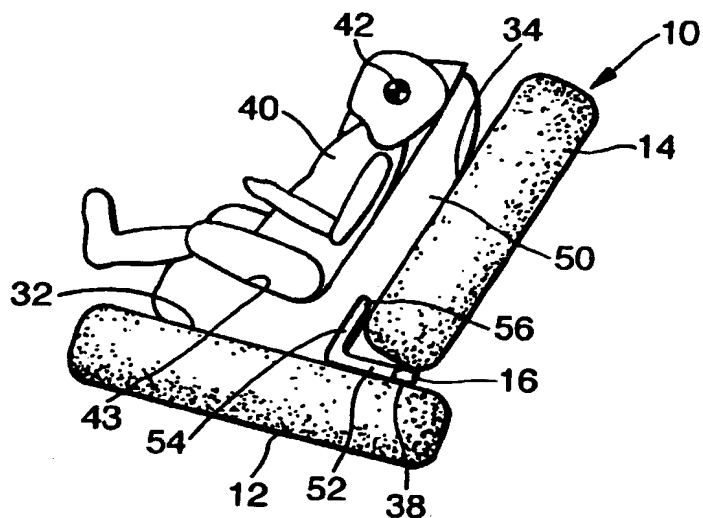


Fig.6.



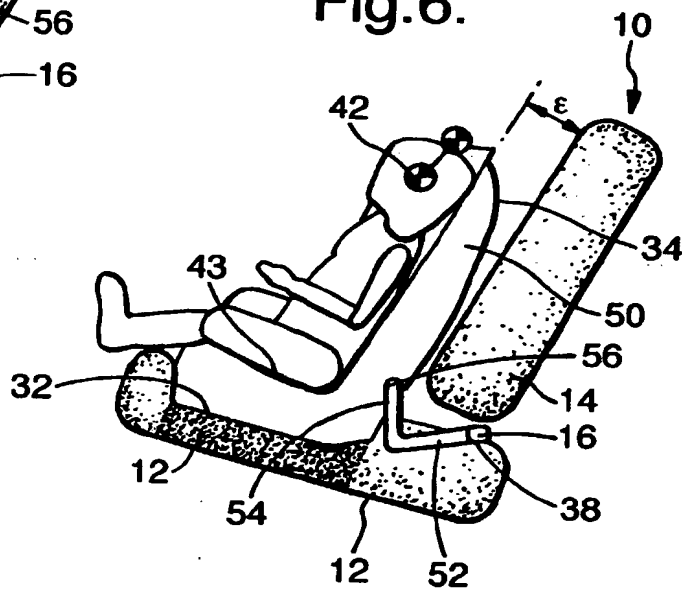


Fig.7.



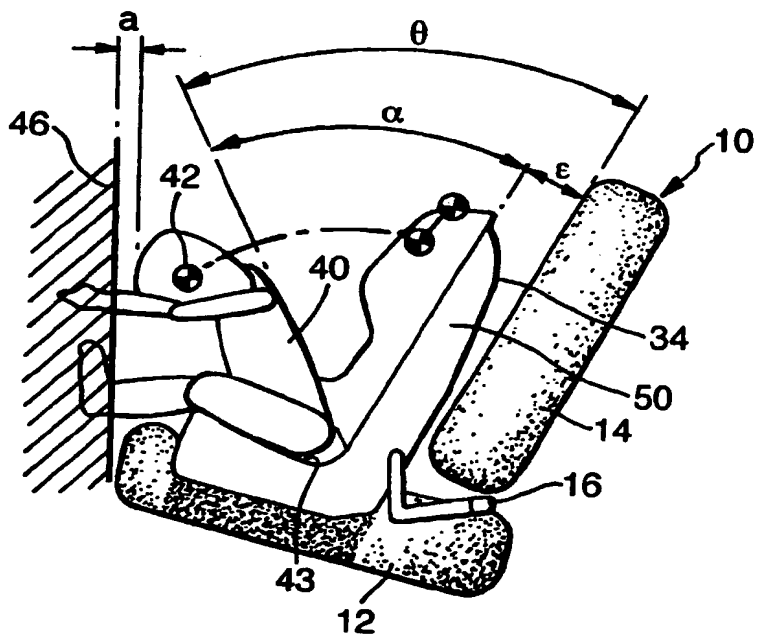

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 090 804 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
02.01.2002 Bulletin 2002/01

(51) Int Cl.7: **B60N 2/28**

(43) Date of publication A2:
11.04.2001 Bulletin 2001/15

(21) Application number: **00308653.5**

(22) Date of filing: **02.10.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Maler, Dieter**
89537 Glengen/Brenz (DE)

(74) Representative: **Hollinghurst, Antony**
Britax International Services Limited Unit 5 Kiln
Acre Wickham Road
Fareham Hampshire PO16 7JS (GB)

(30) Priority: **09.10.1999 GB 9923868**


(71) Applicant: **BRITAX RÖMER Kindersicherheit**
GmbH
D-89024 Ulm (DE)

(54) **Child safety seat**

(57) A child safety seat comprises a child seat structure (50) having a base support surface (32) for resting on a vehicle seat cushion (12) and a back support surface (34) for abutting against the seat back (14) of the vehicle seat (10). A rigid link (52, 54) is pivotally attached to the child seat structure (50) so as to project from the child seat structure (50) between the base support surface (32) and the back support surface (34). A release-

able connector (38) is mounted on the rigid link (52, 54) for engagement with a standard anchorage unit (16) associated with the vehicle seat (10). In the event of sudden deceleration, both the front and rear edges of the base support surface (32) are pressed downwards into the vehicle seat cushion (12) simultaneously. This results in a reduction of the extend of forward excursion of the child's head (42).

Fig.7.

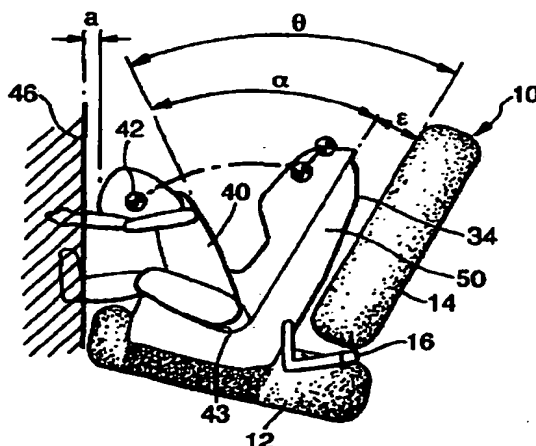



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 8653

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 816 651 A (FEUERHERDT INGO) 6 October 1998 (1998-10-06) * the whole document *	1-3	B60N2/28
A	DE 197 08 044 C (AUDI NSU AUTO UNION AG) 10 June 1998 (1998-06-10)		
A	DE 295 06 847 U (WUERSTL CURT VERMOEGENSVERWALT) 22 June 1995 (1995-06-22)		
A	DE 197 23 345 C (FAURE BERTRAND SITZTECH GMBH) 9 July 1998 (1998-07-09)		
A,D, P	EP 0 952 032 A (BRITAX EXCELSIOR) 27 October 1999 (1999-10-27)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B60N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19 October 2001	Examiner Horváth, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.92) (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 8653

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-10-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5816651 A	06-10-1998	DE 19521889 A1	19-12-1996
		FR 2735428 A1	20-12-1996
		GB 2302274 A , B	15-01-1997
		IT RM960367 A1	01-12-1997
		JP 2741369 B2	15-04-1998
		JP 9164869 A	24-06-1997
		US 5669663 A	23-09-1997
DE 19708044 C	10-06-1998	DE 19708044 C1	10-06-1998
DE 29506847 U	22-06-1995	DE 29506847 U1	22-06-1995
DE 19723345 C	09-07-1998	DE 19723345 C1	09-07-1998
EP 0952032 A	27-10-1999	EP 0952032 A2	27-10-1999
		US 6082819 A	04-07-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)